
owo

Your Bitcoin, in naira.

Borrow MUSD against your BTC on Mezo and get naira in any Nigerian bank account. One flow, two signatures, no BTC for gas.

Track 2 · Access & Distribution | Mezo Buildathon · Wave 1 | Live on Mezo testnet

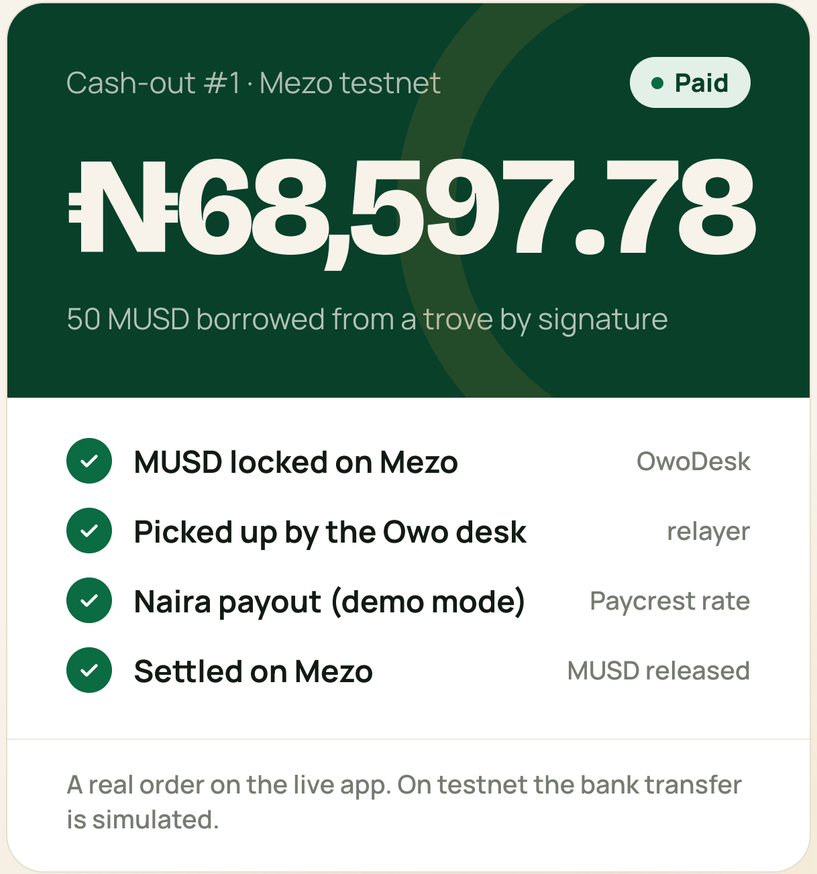


THE PROBLEM

You hold Bitcoin. Rent in Lagos is due in naira.

1	Borrow MUSD against BTC on Mezo	works today
2	~~Swap MUSD on a thin DEX pool~~	slippage
3	~~Bridge to another chain~~	fees
4	~~Send to an exchange~~	fees
5	~~Sell peer to peer~~	spread
6	~~Wait for the naira to land~~	time

Mezo's own pools are thin

MUSD / mUSDC	4.8k / 6.8k
MUSD / mUSDT	7.7k / 5.5k
BTC / MUSD	0.48 BTC / 38.9k

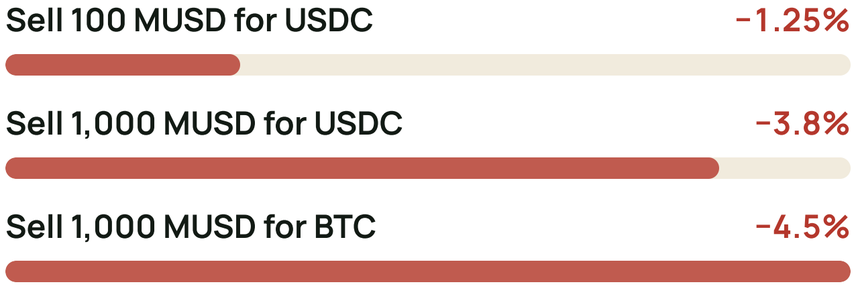

Mezo mainnet pools, read on-chain Oct 24, 2026.

THE SOLUTION

One flow. Two signatures. No BTC for gas.

01

Choose an amount

Draw it from your Mezo trove, or use MUSD already in your wallet. The naira amount is shown up front at Paycrest's live rate.

02

Pick your bank

Any of 174 Nigerian banks. Owo reads the account name back to you before you sign.

03

Sign twice

No transactions to send. Your trove mints MUSD straight into a locked order on OwoDesk, and Owo's relayer pays the gas.


04

Get paid

The desk pays the naira out through Paycrest, an open stablecoin-to-bank network, and only then takes your MUSD.


Three ways in: `borrowAndCashOut` gasless, mints from the trove | `cashOutWithPermit` gasless | `cashOut` wallet tx

From trove to bank account in four screens.

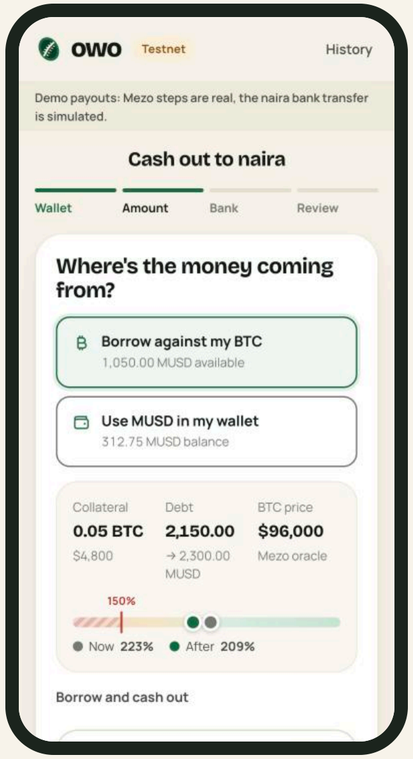


Borrow route

Trove health before and after

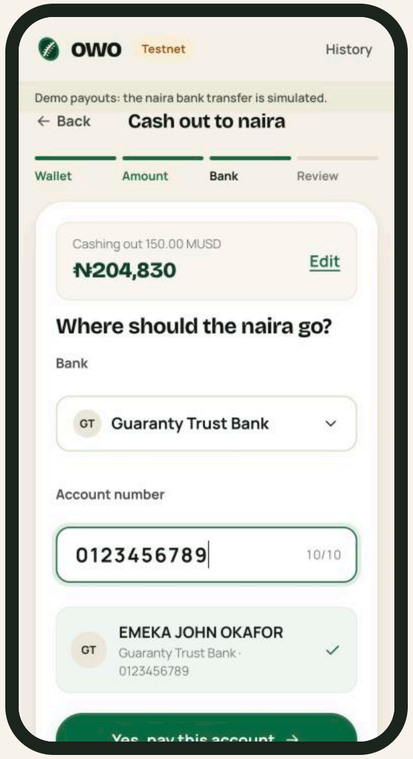


Name check

Account name read back first

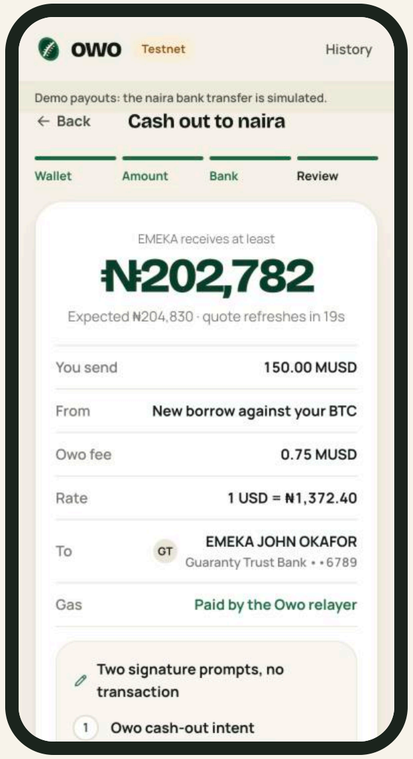

Review and sign

Naira floor, fee, relayer pays gas

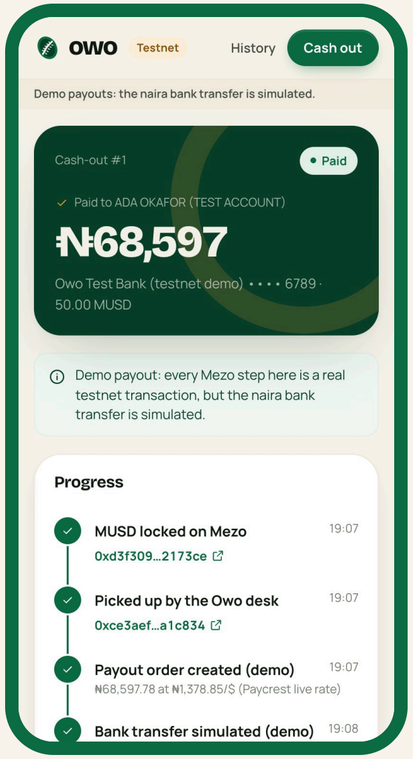


Paid · live order #1

Each Mezo step links to the explorer

HOW IT WORKS

One approval borrows and opens the order.

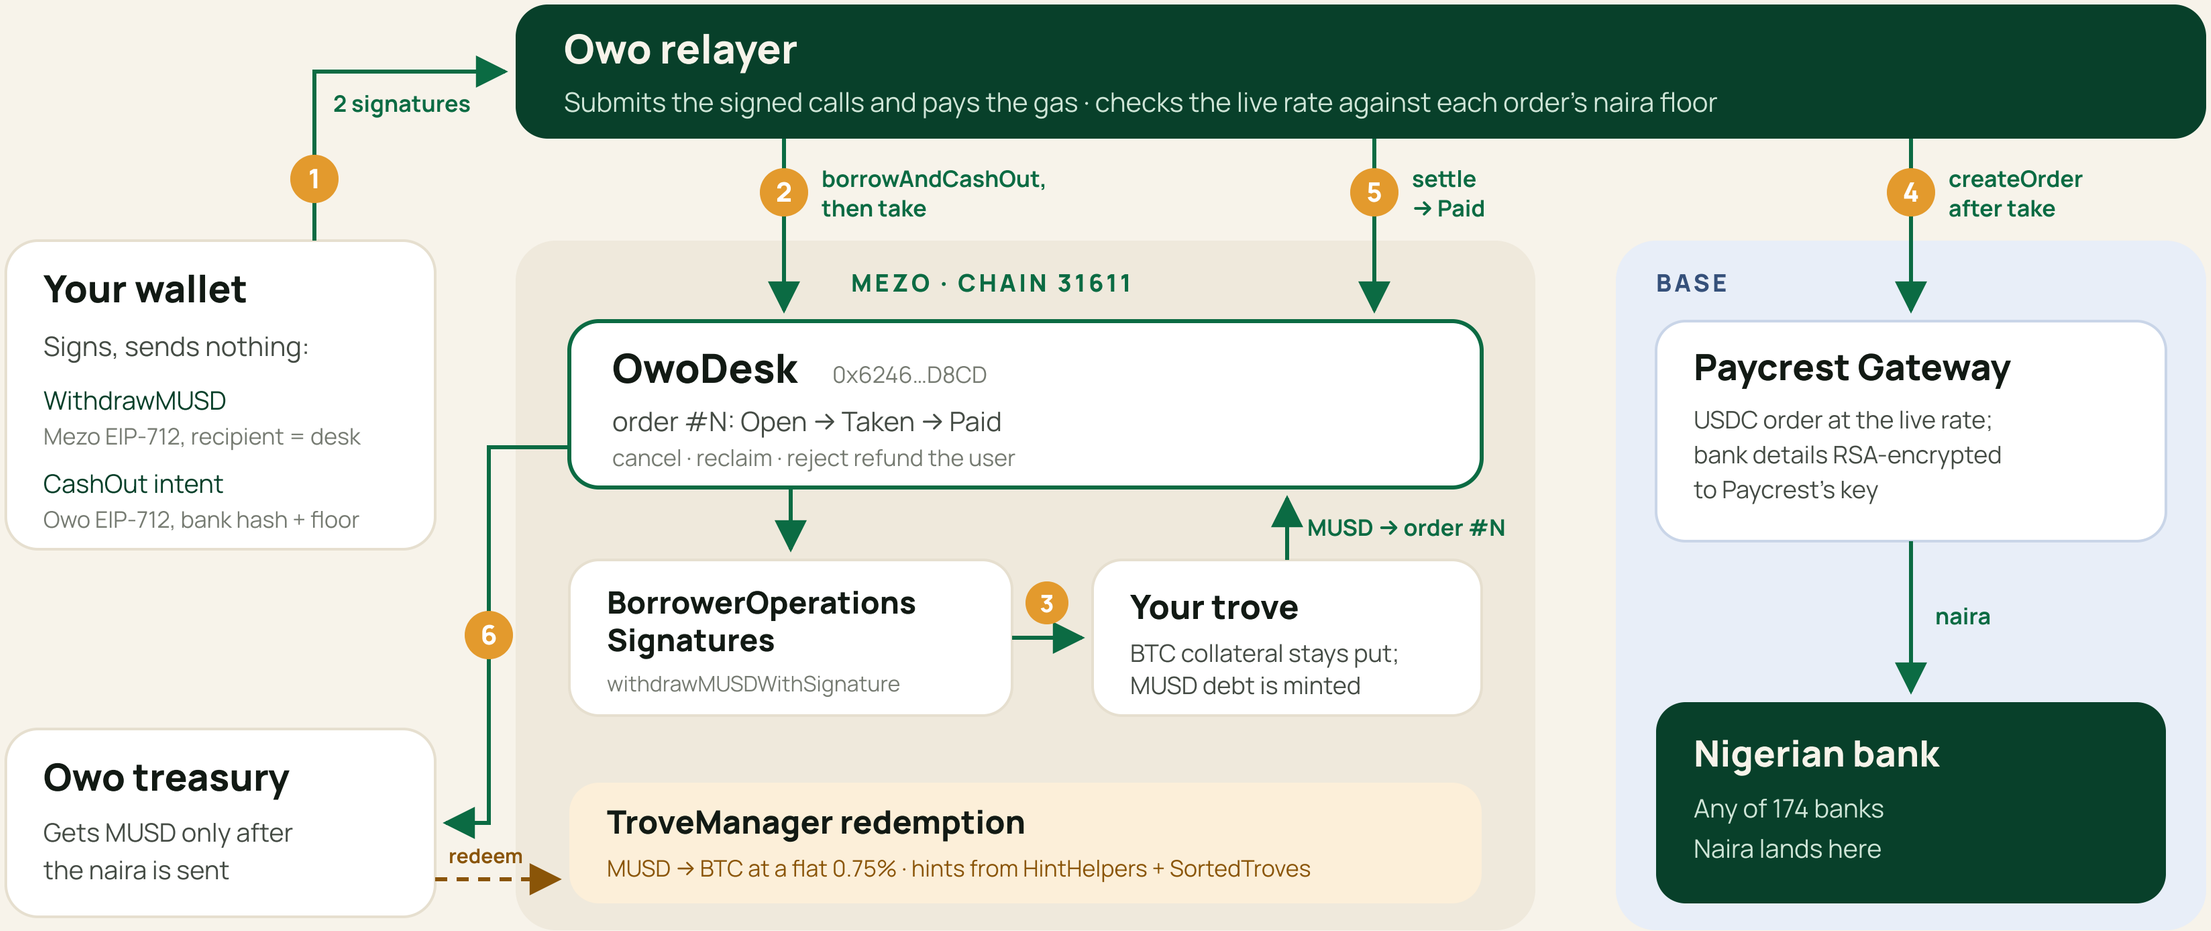


Dashed: treasury exit by redemption; automating it is on the roadmap

SAFETY

Your MUSD is released only after the naira is sent.

ORDER LIFECYCLE ON OWODESK

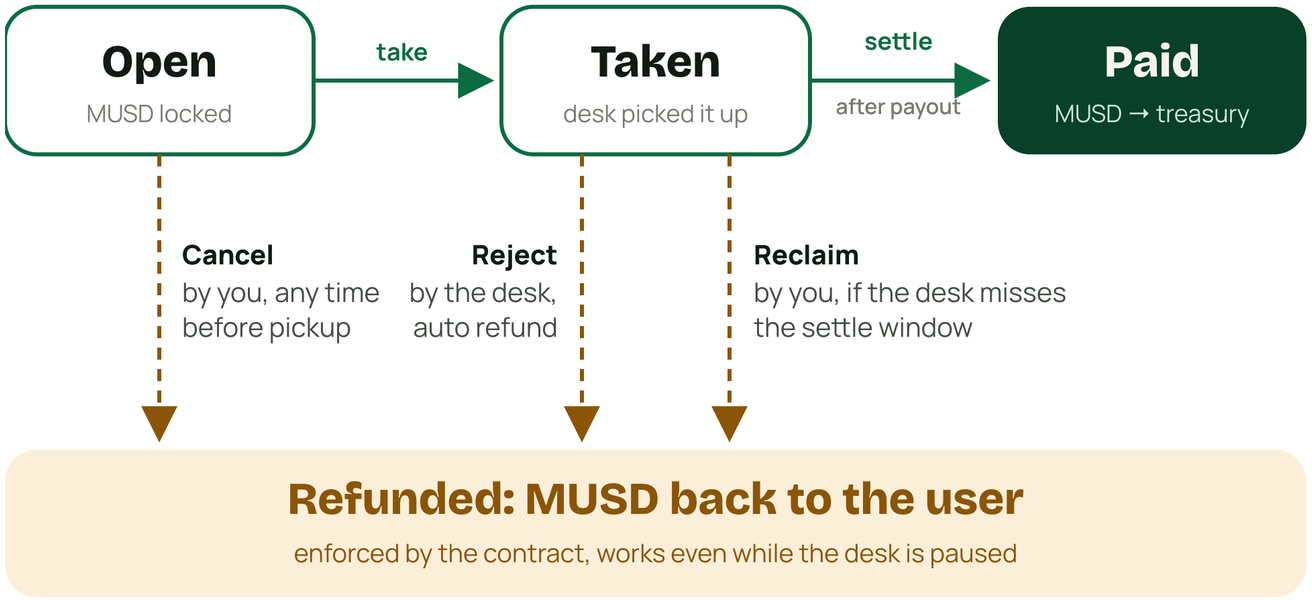

A signed intent can't be redirected

The EIP-712 CashOut intent binds:

owner · amount · naira floor · bank-details hash

A relayed signature can't pay someone else's account, or pay you less.

Bank details stay off-chain

Only a salted hash goes on Mezo. The details are RSA-encrypted to Paycrest's key.

Limits and a pause switch

Min and max order size, a daily cap, pause. Users can always exit, even while paused.

MEZO INTEGRATION

Built on Mezo's own primitives, not a wrapper.

`BorrowerOperationsSignatures .withdrawMUSDWithSignature`

The user signs `WithdrawMUSD` with the desk as recipient, so the loan and the cash-out happen in one relayed call.

`MUSD.permit (EIP-2612)`

MUSD already in the wallet cashes out gaslessly through `cashOutWithPermit`.

`TroveManager · HintHelpers · SortedTroves`

The treasury exits MUSD by protocol redemption at `BorrowerOperations.redemptionRate` (0.75%), not the thin pools.

`PriceFeed · trove reads`

The borrow screen shows collateral, debt and the ratio before and after, priced by the Mezo oracle.

Two things we found the hard way

WITHDRAWMUSD TO A CONTRACT

`withdrawMUSD` always makes a native call to the recipient for the collateral change, which is 0 BTC when only MUSD is drawn. A contract recipient needs a `receive()`.

OwoDesk accepts zero-value calls and refuses real BTC.


REDEMPTION HINTS CAN OVERSHOOT

`HintHelpers.getRedemptionHints` keeps walking past a skipped partial redemption, so its truncated amount can be more than TroveManager will take, and the call reverts.


Owo walks `SortedTroves` itself and sizes the batch to what will actually redeem.

PROOF

Live on Mezo testnet, with real cash-outs.

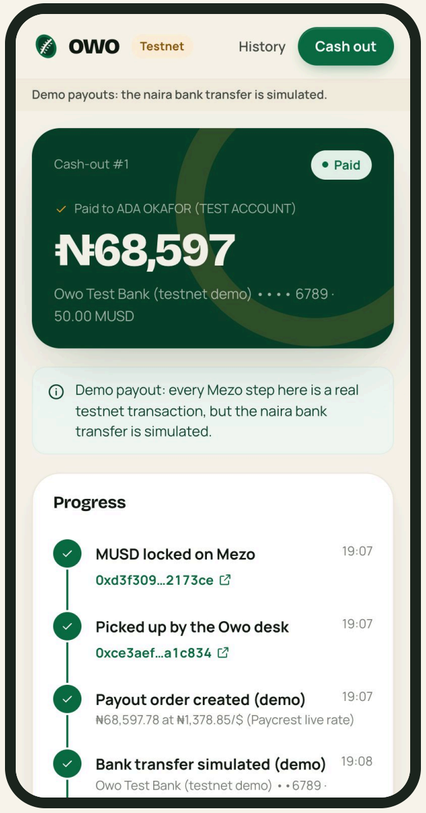

#1 · borrowed by signature

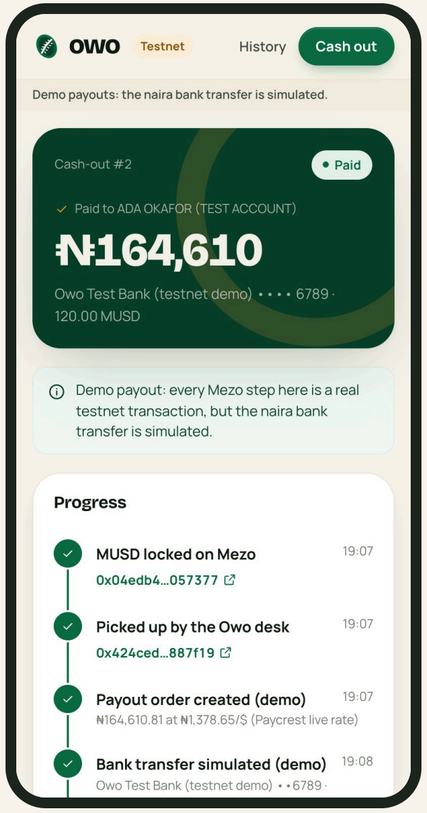

#2 · wallet MUSD by permit

OWODESK · MEZO TESTNET (31611)

`0x62465d6c87fA5551a379Ca12F135173ed8dAd8CD`

SETTLED ORDERS

₦68,597.78

#1 · 50 MUSD from a trove

₦164,610.81

#2 · 120 MUSD from the wallet

TESTS

28 contract tests: 25 unit + fuzz, and 3 fork tests on a real Mezo trove, real MUSD, real signatures

E2E contract + relayer + API on a Mezo testnet fork, both routes, end to end, then the treasury redeems its MUSD for BTC through TroveManager

On testnet the bank transfer is simulated (demo mode): test MUSD has no value. The Paycrest payout path is built and was rehearsed against Base mainnet's Gateway on a fork.

BUSINESS MODEL

A fee per cash-out, and a cheaper exit.

1%

Owo fee per cash-out

Shown up front in the quote. It covers the desk's 0.75% redemption exit plus gas, leaving about 0.25% margin. The user still gets more naira than selling on Mezo's DEX.


Who it's for

Nigerians who hold BTC and need naira for rent and bills, without selling the BTC. Mezo's kickoff Q&A named borrow-to-bank-account as a Track 2 fit.

Corridors through Paycrest

NGN · now | GHS | KES | UGX | TZS

How the desk exits 1,000 MUSD

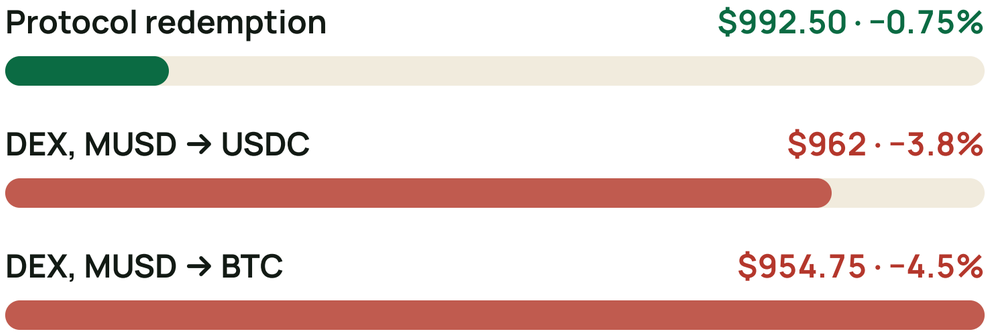

Redemption is a flat fee at any size, so the desk's exit cost doesn't grow with volume the way pool slippage does. It also takes collateral from the riskiest troves at $1, which helps hold the peg.

Mezo mainnet, read on-chain Oct 24, 2026.

ROADMAP

Next: real naira on mainnet.

WAVE 1 · SHIPPED

Testnet desk

- **OwoDesk** on Mezo testnet, three routes in
- **Relayer** with the Paycrest Gateway payout
- **The app**, live, with two settled orders
- **28 tests** plus a local end-to-end run

WAVE 2 · NOV 2–15

Mainnet, one click

- **Real naira on mainnet** with per-user limits
- **Open a trove in the same flow** via `openTroveWithSignature`
- **Mezo Passport** so Bitcoin wallets can sign
- **Automated float rebalancing**: MUSD → BTC by redemption → Base USDC

THEN

More corridors

- **Ghana** (GHS)
- **Kenya** (KES)
- Uganda and Tanzania, which Paycrest also supports



neromtoobad

Solo builder

- **Contract:** OwoDesk in Solidity, with Foundry unit, fuzz and Mezo fork tests
- **Relayer:** Node, viem and Hono; the Paycrest payout and the redemption exit
- **App:** Vite, React and viem; designed around the naira amount

X · @neromtoobad

GitHub · neromtoobad

Owo. Your Bitcoin, in naira.

TRY IT	owo-production-f83c.up.railway.app
CODE	github.com/neromtoobad/owo
DESK	`0x62465d6c87fA5551a379Ca12F135173ed8dAd8CD`

No real bank details needed: pick "Owo Test Bank (testnet demo)" with any 10-digit number.